

RPE Srl

Leader in Fluid Management Control

100%
MADE IN ITALY

Connect'eedy InLine 6th Series



www.rpesrl.it



Main features

100%
MADE IN ITALY

2

Working pressure: 0.5-10bar

Room temperature: 0-60°C

Fluid temperature: 0-60°C

Flow direction: unidirectional

Nominal diameter: Ø20mm

Control: NC, NO, latching

Inlet: 1"BSPP Swivel F / 1"M


Outlet: 1"BSPP Swivel F / 1"M

Electrical connection:

Unipolar cables 600mm

Bipolar cables max 5000mm

Male Faston 6,3x0,8mm

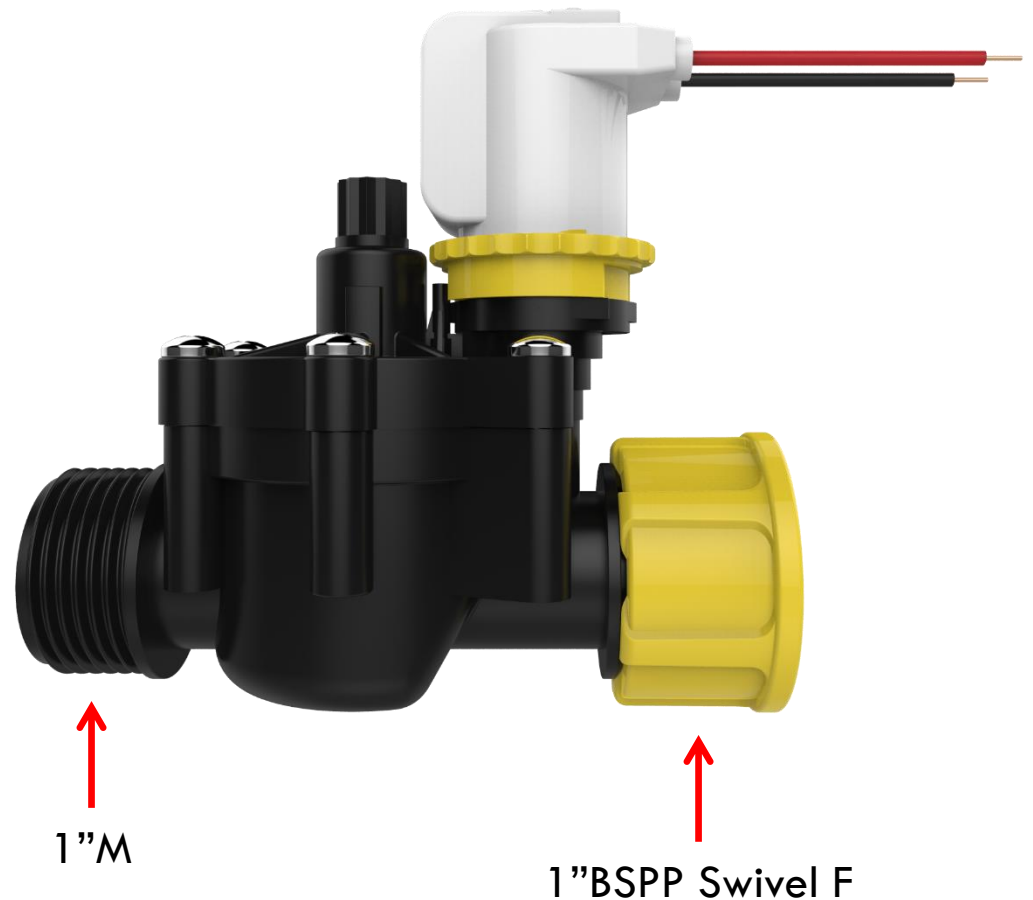




Configurations

100%
MADE IN ITALY

3

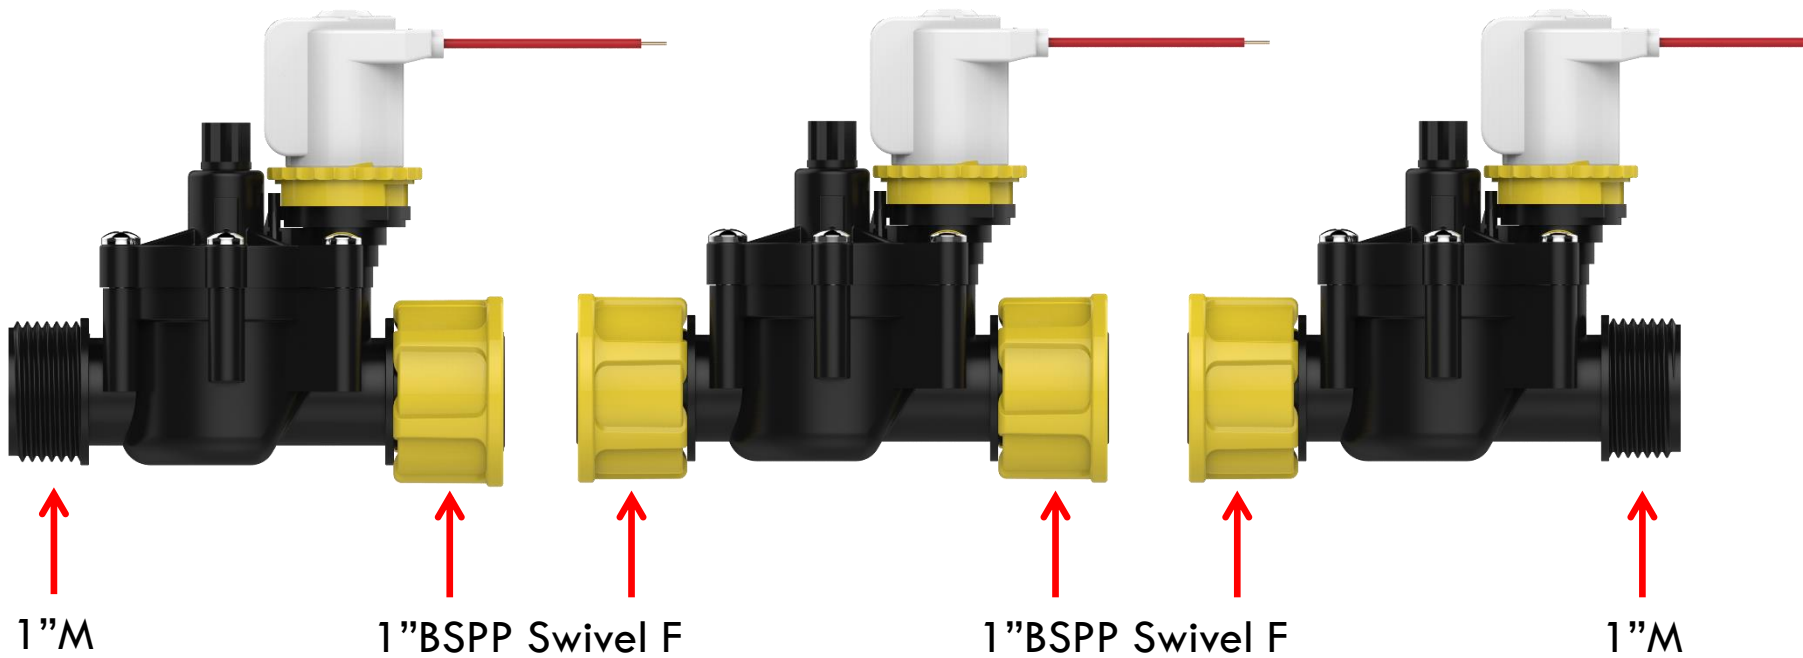



Physical characteristics

100%
MADE IN ITALY

4

Valve body: PA 66 GF 30%

Diaphragm: NBR (buna)

Core: stainless steel

Spring: stainless steel

Assembly: with screws, serviceable





Applications

100%
MADE IN ITALY

5

- Agricultural land
- Sport facilities
- Small terraces
- Vertical walls
- Series installation in irrigation valve boxes





Solenoids

100%
MADE IN ITALY

6

- 12V AC, DC
- L9V, L12V DC
- 24V AC, DC
- 110V AC
- 230V AC





Thanks

100%
MADE IN ITALY

7



Nothing great has ever been done without passion