



ELETTROVALVOLE
TERZA SERIE
BASSA PRESSIONE

-

SOLENOID VALVES
THIRD SERIES
LOW PRESSURE

THIRD SERIES LOW PRESSURE



PHYSICAL SPECIFICATIONS


- VALVE BODY: PA 66-30% GF
- DIAPHRAGM: NBR
- CORE: STAINLESS STEEL
- COIL: F CLASS (155°)
- ASSEMBLY: SELF-TAPPING SCREW

WORKING SPECIFICATIONS

- WORKING PRESSURE: 0,05 - 1 bar
- ROOM TEMPERATURE: TU 60°C
- FLUID TEMPERATURE: Tm 60°C - ED 100%
- ORIFICE: from 25 to 32 mm
- CONTROL: NC, NO, LATCHING
- FLUID DIRECTION: UNIDIRECTIONAL

ELECTRICAL CONNECTIONS


- FASTON 6,3 X 0,8 mm
- UNIPOLAR CABLES MAX 600 mm
- BIPOLAR CABLES MAX 5000 mm

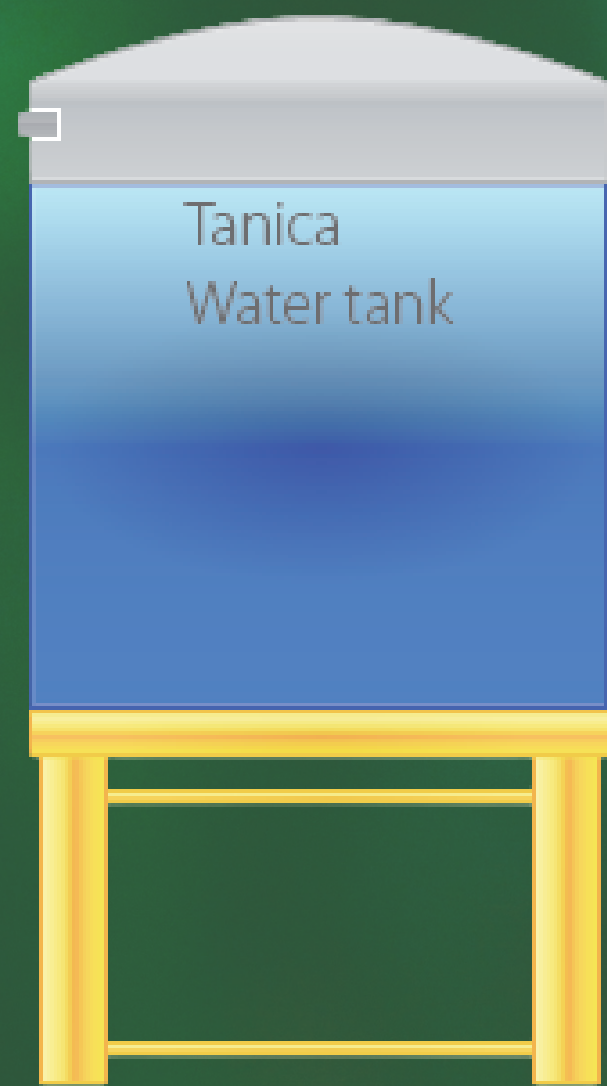

Tanica
Water tank

Altezza 50 cm
Height 50 cm

RPE's irrigation controller PRO 100

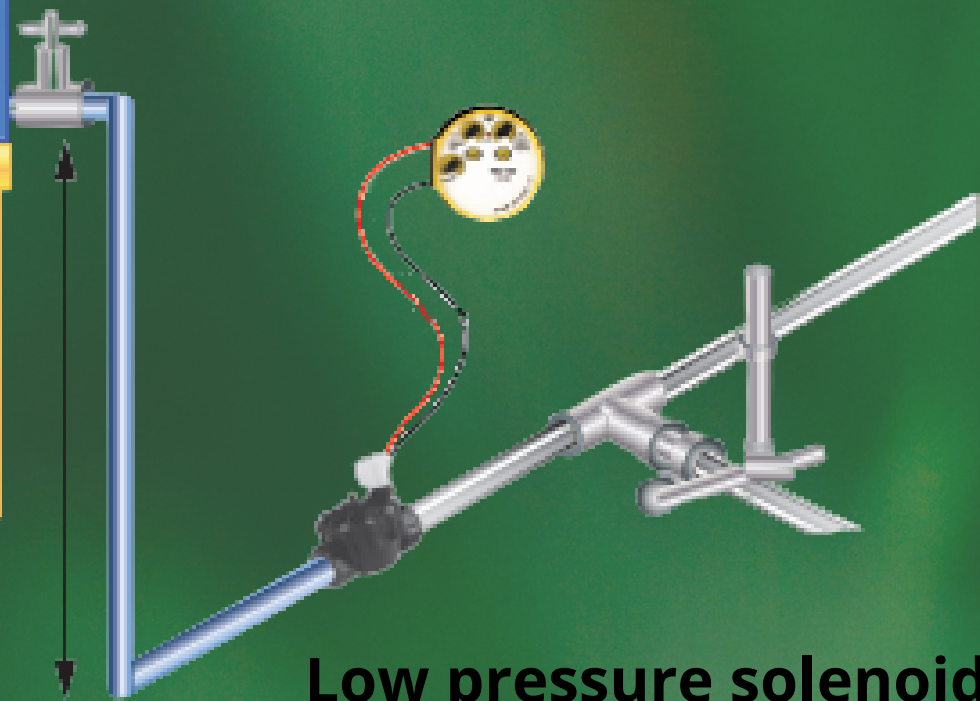

Low pressure solenoid valve

APPLICATIONS



**RAIN BARRELS FOR
IRRIGATION**



AGRICULTURAL LAND



GARDENS



TERRACES



MADE IN ITALY

CONTACT US FOR MORE INFO :



customercare@rpesrl.it



www.rpesrl.com



+39 0331832515

